

UL Style No.1331

技术参数 Technical parameters

额定电压(Rated voltage): 600V

额定温度(Rated temperature): -55~150℃


标准(Standard): UI758

应用 Application

适用于各种家用电器，照明灯具，工业机器，电热制品等配线。

Applicable to all kinds of home appliances, lighting, Equipments, Thermal products.

构造 Structure

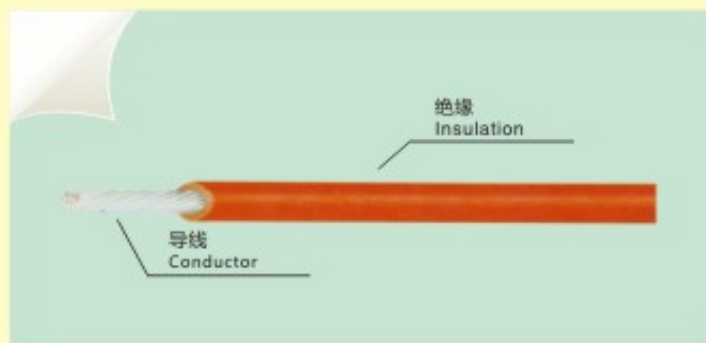

规格表 / 产品型号、规格 Specifications / Product Models

导体 Conductor			绝缘体 Insulator		导体电阻 Conductor resistance	包装 Packing
线规 Line gauge	线数/线径 The number of lines / wire diameter	直径 Diameter	绝缘厚度 Thickness	完成外径 Outer diameter		
30	7/0.10	0.30	0.50	1.30	361	(610)/(2000)
28	7/0.12	0.38	0.50	1.38	227	(610)/(2000)
26	7/0.16	0.48	0.50	1.48	143	(610)/(2000)
24	19/0.12	0.60	0.50	1.60	89.3	(610)/(2000)
22	19/0.15	0.75	0.50	1.75	56.4	(305)/(1000)
20	19/0.19	0.93	0.50	1.93	35.2	(305)/(1000)
18	19/0.235	1.17	0.50	2.17	22.2	(305)/(1000)
16	19/0.30	1.50	0.50	2.50	14	(305)/(1000)
14	19/0.37	1.85	SPC0.50	2.85	8.78	(305)/(1000)
12	19/0.47	2.35	0.50	3.35	5.53	(305)/(1000)
10	19/0.61	3.00	0.50	4.00	3.476	(305)/(1000)
8	37/0.54	3.78	0.76	5.30	2.16	订货要求 Customizable
7	37/0.60	4.20	0.76	5.72	1.716	
6	37/0.68	4.76	0.76	6.28	1.361	
5	37/0.76	5.32	0.76	6.84	1.079	
4	37/0.86	6.02	0.76	7.54	0.8559	
3	7/2.21	6.63	0.76	8.15	0.6788	
2	7/2.48	7.44	0.76	8.96	0.5384	
1	7/2.78	8.34	1.14	10.62	0.4268	
0	7/3.20	9.60	1.14	11.88	0.3367	
2/0	7/3.57	10.71	1.14	12.99	0.267	
3/0	7/3.94	11.82	1.14	14.10	0.2119	订货要求 Customizable
4/0	7/4.42	13.26	1.14	15.54	0.168	