

UL Style No.1332

技术参数 Technical parameters

额定电压(Rated voltage): 300V

额定温度(Rated temperature): -55~200℃


标准(Standard): UI758

应用 Application

适用于各种家用电器, 照明灯具, 工业机器, 电热制品等配线

Applicable to all kinds of home appliances, lighting, industrial machine Heater, electrothermal products distribution

构造 Structure

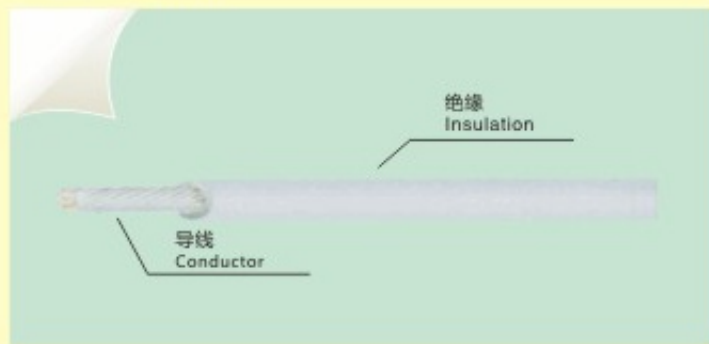

规格表 / 产品型号、规格 Specifications / Product Models

导体 Conductor			绝缘体 Insulator		导体电阻 Conductor resistance	包装 Packing
线规 Line gauge	线数/线径 The number of lines / wire diameter	直径 Diameter	绝缘厚度 Thickness	完成外径 Outer diameter		
30	1/0.26	0.26	0.20	0.65	361	(610)/(2000)
	7/0.10	0.30	0.25	0.80		
28	1/0.32	0.32	0.25	0.83	227	(610)/(2000)
	7/0.12	0.36	0.25	0.86		
26	7/0.16	0.48	0.28	1.02	143	(610)/(2000)
	19/0.10	0.48	0.30	1.08		
24	1/0.50	0.50	0.305	1.11	89.3	(610)/(2000)
	7/0.20	0.60	0.305	1.21		
	19/0.12	0.60	0.305	1.21		
22	1/0.65	0.65	0.33	1.31	56.4	(305)/(1000)
	7/0.254	0.76	0.33	1.42		
	19/0.15	0.75	0.33	1.41		
20	1/0.81	0.81	0.33	1.47	35.2	(305)/(1000)
	7/0.31	0.93	0.33	1.59		
	19/0.19	0.93	0.33	1.59		
18	1/1.02	1.02	0.33	1.68	22.2	(305)/(1000)
	7/0.39	1.17	0.33	1.83		
	19/0.235	1.17	0.33	1.83		
16	1/1.30	1.30	0.33	1.96	14	(305)/(1000)
	7/0.49	1.47	0.33	2.13		
	19/0.30	1.50	0.33	2.16		
14	19/0.37	1.85	0.33	2.51	8.78	(305)/(1000)
12	19/0.47	2.35	0.33	3.01	5.53	(305)/(1000)
10	19/0.61	3.05	0.33	3.71	3.476	(305)/(1000)